
PULSCO Air Control Center

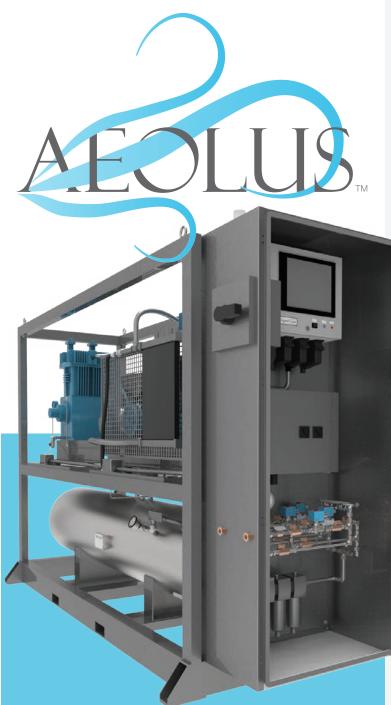

AEOLUS PRODUCT LINE


PULSCO offers a complete line of air control center assemblies designed and built in the USA for hydropneumatic systems.

PULSCO's Aeolus Air Control Center offers a plug and play solution that arrives to site preassembled and ready to be started up.

This product line saves time by removing the issue of on site assembly, confusion associated with receiving multiple packages to site, and protects against possible missing parts upon arrival. Preassembly also retains the integrity of the Aeolus Air Control Center by being factory built and assembled as intended, instead of on site installations that could allow for misassembly.

These compact air control centers are user friendly and built with durable components.

Aeolus means peace of mind.

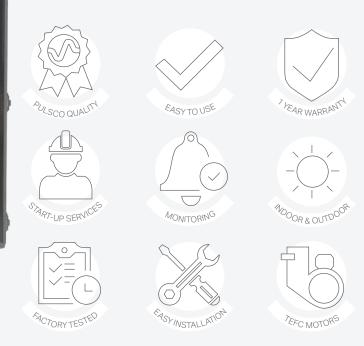


700-2107

PULSCO.COM SALES@PULSCO.COM +1 (949) 261-1717



PULSCO Air Control Center



AEOLUS SIMPLEX One set of valves Controls 1 Hydropneumatic System

STANDARD FEATURES

150 psi Cut In | 175 psi Cut Out Skypark Controller Local PLC/HMI Controls Alarm Indicators Discreet and Modbus TCP/IP Signals for Remote Monitoring Control Cabinet Hinge on Right 50°C Motor

AEOLUS SIMPLEX

CFM **High Pessure Option** Receiver **Estimated Dimensions** Input Voltage Estimated Weight

AEOLUS DUPLEX

CFM **High Pressure Option** Receiver Estimated Dimensions Input Voltage Estimated Weight



17 CFM NO 80 GALLONS | 300 PSI 90L - 44W - 80H 240V/480V 2.860 LBS.

AEOLUS - 705

< 5,000 Gallons

5 HP

34 CFM NO 120 GALLONS | 300 PSI 120L - 44W - 80H 240V/480V 4,020 LBS.

33 CFM YES 80 GALLONS | 300 PSI 90L - 44W - 80H 240V/480V 3.330 LBS.

AEOLUS - 710

66 CFM YES 120 GALLONS | 300 PSI 120L - 44W - 80H 240V/480V 4,960 LBS.

ADDITIONAL OPTIONS

Break In Service Hinge on Left Food Grade Compressor Oil High Pressure System - For 10 HP Only 250 PSI Cut in | 275 PSI Cut Out **Control Panel Heaters**


AEOLUS - 715

> 10.000 Gallons 15 HP

49 CFM NO 80 GALLONS | 300 PSI 90L - 44W - 80H 480V 3,405 LBS.

98 CFM NO 120 GALLONS | 300 PSI 120L - 44W - 80H 480V 5,090 LBS.

PULSCO.COM SALES@PULSCO.COM +1 (949) 261-1717



AEOLUS DUPLEX

Two sets of valves Controls 2 Hydropneumatic Systems or provides redundancy for 1 system

Stainless Steel Air Receiver Auto Condensate Drain Oil Free Air Produced by 3 Filters 5 Micron, 0.01 Micron, Activated Carbon Painted Carbon Steel Frame

Lockable Enclosure Pre-installed Vibration Isolation Pads Can be Installed by Forklift or Crane

5,000 Gallons - 10,000 Gallons 10 HP